214 Copy RM A52E22



NACA RM A52E22

7339



# RESEARCH MEMORANDUM

FORCES AND MOMENTS ON POINTED AND BLUNT-NOSED BODIES

OF REVOLUTION AT MACH NUMBERS FROM 2.75 TO 5.00

By David H. Dennis and Bernard E. Cunningham

Ames Aeronautical Laboratory Moffett Field, Calif.



NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

WASHINGTON August 8, 1952

Classification cancelled for changed to	
By Fulhority of Jase Jean Pris Arm Dynaman 17127	
NAME AND	
NK	
GRADE OF OFFICER MAKING CHANGE)	
DATE	

<u>ii.</u>

1044

0144369

NACA RM A52E22

### SECURITY INFORMATION

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

#### RESEARCH MEMORANDUM

FORCES AND MOMENTS ON POINTED AND BLUNT-NOSED BODIES

OF REVOLUTION AT MACH NUMBERS FROM 2.75 TO 5.00

By David H. Dennis and Bernard E. Cunningham

#### SUMMARY

Results of force and moment tests at Mach numbers from 2.75 to 5.00 on pointed and blunt-nosed bodies of revolution are presented and compared with predictions of the second-order cone theory of Stone and the impact theory of Newton. Cones and tangent ogives of fineness ratios from 3 to 7, and blunt-nosed shapes having fineness ratios of 3 and 5, were tested at angles of attack from 0° to 25°. Reynolds numbers based on body length varied from 0.5 million to 6.4 million, depending on body fineness ratio and test Mach number.

Comparisons of force characteristics of the various body shapes show that the blunt-nosed shapes are generally more efficient lifting bodies, from the standpoint of lift-drag ratios, than the cones or ogives of the same fineness ratio. It is also found throughout the Mach number range that within the range of fineness ratios tested, increasing body fineness ratio results in higher lift-drag ratios.

Predictions of the inclined-cone theory of Stone are found to agree well with experimentally determined characteristics of cones up to angles of attack equal to their semiapex angles. At higher angles of attack the measured lifts and increments of drag are higher than predicted by the theory. Throughout the angle-of-attack range the impact theory predicts lower lift and higher increments of drag than measured, but, as might be expected, the agreement between theory and experiment improves with increasing Mach number.

# INTRODUCTION

The attainment of higher supersonic speeds by missiles has been accompanied by a trend toward configurations consisting principally of a body, with small planar surfaces attached primarily for the purpose of



achieving stable and controlled flight. It is evident, of course, that the resultant aerodynamic forces acting on such a configuration are contributed in large part by the body. Hence, it may be expected that accurate knowledge of the forces and attendant moments acting on inclined bodies will be essential to the proper design of missiles operating at high supersonic Mach numbers.


At present, however, information on inclined body characteristics at high Mach numbers is restricted to that obtainable from approximate theories and to that provided by a limited number of experiments. Of the available theories for predicting the forces and moments on inclined bodies, perhaps the most suitable at the Mach numbers under consideration are those of Stone and Ferri for cones (references 1 and 2, respectively) and that of Newton (i.e., the impact theory, reference 3) for bodies of arbitrary shape. In general, however, the former theories are not applicable to comes inclined at large angles with respect to the free stream. while the Newtonian theory cannot be expected to apply accurately to typical body shapes unless the free-stream Mach number is very large compared to 1 (i.e., the flight speed is hypersonic). Thus it is evident that theory, as now developed, does not adequately provide the desired aerodynamic information. In the case of experiment, some data for inclined bodies are available for Mach numbers of about 4 (see, e.g., references 4 and 5) but only limited tests at higher Mach numbers have been reported (see reference 6). In all the tests at high supersonic speeds reported to date, body shapes have been restricted to cone or ogive cylinders and only a few detailed comparisons with theories have been made.


It is evident, then, that more information of both an experimental and theoretical nature is needed on the aerodynamic characteristics of inclined bodies at high supersonic speeds. As a step in the direction toward providing this information, an experimental program to determine the aerodynamic characteristics of bodies of revolution at angles of attack from 0° to 25° and Mach numbers from 2.7 to 5 was undertaken. The first phase of this program, reported herein, concerns the determination of the force and pitching-moment characteristics of pointed nose sections of fineness ratios from 3 to 7 and blunt-tipped nose sections of fineness ratios 3 and 5. A comparison of these characteristics with those predicted by the theories previously discussed is also included.

#### SYMBOLS

 $c_D$  drag coefficient  $\left(\frac{D}{q\pi r_b^2}\right)$ 

 $\triangle\!\mathbb{C}_D$   $\,$  increment of drag coefficient due to angle of attack





$\mathtt{c}_\mathtt{L}$	lift coefficient	$\left(\frac{\underline{L}}{q_\pi r_b^{\ 2}}\right)$
-------------------------	------------------	--

- $C_{m}$  pitching-moment coefficient about body nose  $\left(\frac{\text{pitching moment}}{q_{\pi}r_{b}^{2}l}\right)$
- c.p. center of pressure location, percent body length from nose
- D body drag
- f body fineness ratio  $\left(\frac{l}{2r_b}\right)$
- L body lift
- M free-stream Mach number
- body length
- q free-stream dynamic pressure
- r body radius
- rb radius of body at base .
- Re Reynolds number based on body length
- x axial distance measured from body nose
- n exponent in equation defining body shapes
- α angle of attack

#### EXPERIMENT

#### Test Apparatus and Methods

The tests were conducted in the Ames 10- by 14-inch supersonic wind tunnel which is a continuous flow, nonreturn-type tunnel, operating with a nominal supply pressure of 6 atmospheres. By changing the relative positions of the symmetrical top and bottom walls of the wind tunnel, the Mach number in the test section may be varied from approximately 2.7 to 5.0. A detailed description of the wind tunnel and its associated equipment may be found in reference 7.

Aerodynamic forces and moments were measured by a three-component strain-gage balance. Forces parallel and perpendicular to the balance



axis and moments about points slightly downstream of the body bases were determined directly. These forces were resolved to give pitching moments about the body noses and lift and drag forces normal to and parallel with the free-stream direction, respectively. Angles of attack greater than the 45° obtainable by rotating the model-balance assembly were reached with the aid of bent-sting model supports. Tare forces on the sting supports were eliminated by enclosing the stings in shrouds that extended to within 0.040 inch of the model base.

Forces acting on the bases of the models were determined from base-pressure readings made with the aid of a McLeod gage. These forces were subtracted from measured total forces; thus, the data presented include only the aerodynamic forces and moments acting on the portions of the test bodies ahead of the bases.

Static and dynamic pressures in the test section were determined from wind-tunnel calibration data and stagnation pressures measured with a Bourdon type pressure gage.


#### Models

Tangent ogive shapes and shapes defined by the equation

$$r = r_0 \left(\frac{x}{l}\right)^n$$

for values of n equal to 1, 3/4, and 1/2 were tested. Thus, there are included two pointed-nosed shapes, conical (n = 1) and ogival, and two blunt-nosed shapes, slightly blunt (n = 3/4) and parabolic (n = 1/2). To compare the shapes of these bodies, a sketch of the profiles of fineness ratio 3 is shown in figure 1(a). Figure 1(b) is a photograph of the 11 test bodies; the fineness ratios 3, 4, 5, and 7 cones, fineness ratios 3 and 5 3/4-power and 1/2-power blunt bodies, and the fineness ratios 3, 5, and 7 tangent ogives. All models were of polished steel and had base diameters of 1 inch.

The cones and ogives were employed since they are representative of nose sections commonly used on missiles. Also, it may be noted that the cone is an approximation to the minimum drag body of revolution for given base diameter and surface area at high supersonic speeds (see reference 7). The 3/4-power bodies (n=3/4) were included particularly to determine experimentally if the advantage of very low drag (for a given fineness ratio) at zero lift exhibited by this shape (see reference 7) results in a more efficient lifting body than those commonly used. The 1/2-power bodies were chosen since they are sufficiently blunt at the nose to facilitate the installation of a seeker, while having relatively low



zero-lift drag (less, for example, than the ogive of the same fineness ratio; see reference 7). In addition, it is clear that tests on these bodies provide means of determining the accuracy of existing inclined-cone theory and the applicability of the impact theory to bodies of a fairly wide range of shapes in the test Mach number range.

#### Accuracy of Test Results

Variations in Mach number in the region of the test section where models were located did not exceed ±0.06 at any test condition and, in general, deviations from nominal Mach numbers were not greater than ±0.03. Corresponding variations in stream static pressure were sufficiently small so that buoyancy corrections were necessary only for the measured drags at Mach number 2.75.

Deviations in free-stream Reynolds number for a given Mach number from the values shown in figure 2 did not exceed ±30,000.

The estimated errors in the angle-of-attack values due to uncertainties in corrections for stream angle and for deflections of the model-support system were  $\pm 0.2^{\circ}$ .

Precision of the computed force coefficients was affected both by inaccurate measurements of the aerodynamic forces by the balance system, and by uncertainties in the determination of free-stream dynamic pressures and base pressures. These uncertainties may result in maximum errors in lift and drag coefficients at the high angles of attack of  $\pm 0.008$  at Mach numbers from 2.7 to  $\pm 0.5$ , and  $\pm 0.035$  at Mach number 5.0. At angles of attack less than about  $10^{\circ}$  the corresponding maximum errors are  $\pm 0.004$  and  $\pm 0.015$ , respectively. Possible errors in moment coefficients, due mainly to errors in measured lift, were of the same magnitude as errors in lift coefficients.

It should be noted that the above discussion concerns maximum errors and that, in general, the results presented are in error by less than half of the foregoing estimates.

A possible additional uncertainty in the results presented for M = 5.00 is due to the presence of a small amount of condensed air in the stream. A detailed discussion of condensation in the 10- by 14-inch supersonic wind tunnel and its effects on the forces acting on models may be found in reference 8. In this paper it was shown that for a body of revolution at zero angle of attack and for wedge airfoils, the change in surface pressure due to condensed air in the flow is of the same magnitude as that caused by the effective change in body shape due to boundary-layer growth. In view of this result, it seems logical to expect that the



corresponding pressure change on inclined podies would be small (not exceeding about 10 percent at high angle of attack). As will be observed later, the forces on models were influenced to a relatively small extent by the presence of condensed air.

#### Presentation of Test Results

Because only experimental results typical of those obtained during this investigation are presented in the following discussion, a large portion of the data is not shown in graphical form. All the experimental results of the tests are presented in tables I to XI. Lift, drag, and pitching-moment coefficients, centers of pressure, and lift-drag ratios at the several test Mach numbers are tabulated for each of the 11 test bodies at various angles of attack.

#### DISCUSSION OF RESULTS

#### Experimental Results

Characteristics of cones. To illustrate the effects of fineness ratio on the aerodynamic characteristics of the test bodies, the variations of lift coefficient with angle of attack, with drag coefficient, and with center of pressure for cones of fineness ratios 3, 4, 5, and 7 are shown in figure 3. It may be seen that throughout the test Mach number range the variation of lift coefficient with angle of attack does not change appreciably with cone fineness ratio up to angles of attack of 4° to 5°. At 5° and above the data show that increasing the fineness ratio results in appreciably higher lift coefficients. It is also evident that, although the lift coefficients increase slightly with increasing Mach number at very small angles of attack, the lift coefficients generally decrease with increasing Mach number at angles of attack greater than approximately 10°.

The curves in figure 3 which present the variations of lift coefficient with drag coefficient show that, within the range of fineness ratios tested, increasing fineness ratio results in lower zero-lift drag and lower increments of drag for given increments of lift throughout the Mach number and angle-of-attack ranges. It may also be seen that for a given angle of attack, the drag coefficients of the long cones do not exceed those of the shorter cones until the angles of attack exceed about 15°.

Centers of pressure are approximately the same for all cones tested and, within the ranges of lift coefficient where accurate



center-of-pressure data were obtained, there is little or no shift of centers of pressure with increasing lift or with changes in Mach number.

To show the variation of lifting efficiency with body fineness ratio, the lift-drag ratios of the several cones at Mach number 4.01 are shown as a function of lift coefficient in figure 4. It is clear that, within the range of fineness ratios tested, the lift-drag ratios increase with increasing cone fineness ratio. The maximum lift-drag ratios occur at approximately the same value of lift coefficient ( $C_L \approx 0.32$ ) for all of the cones. Furthermore, the angles of attack for maximum L/D vary only from  $8^{\circ}$  for the fineness ratio 7 cone to  $10^{\circ}$  for the fineness ratio 3 cone.

The effects of Mach number variation on lift-drag ratio are indicated in figure 5 where the lift-drag ratios of the fineness ratio 5 cone are plotted with respect to lift coefficient for the several test Mach numbers. It is evident that at high lift coefficients, lift-drag ratio decreases with increasing Mach number. Maximum lift-drag ratio occurs, under the conditions of the present tests, at Mach number 4.01. However, the large changes of Reynolds number with Mach number and the resultant variation of skin-friction drag may have comparatively large effects on the variation of maximum lift-drag ratio with Mach number. Thus the variation of  $L/D_{\rm max}$  with Mach number at constant Reynolds number would probably be somewhat different from that shown in figure 5.

Effects of profile shape. The effects on aerodynamic characteristics of changes in profile shape of bodies of given fineness ratio are shown in figures 6, 7, 8, and 9. Variations of lift coefficient with angle of attack, drag coefficient, and center of pressure, and variations of lift-drag ratio with lift coefficient are presented for the fineness ratio 3 bodies at Mach numbers 2.75, 4.01, and 5.00 in figures 6, 7, and 8, respectively, and for the fineness ratio 5 bodies at Mach number 4.01 in figure 9.

At a given angle of inclination, lift coefficients vary with body shape approximately as body plan-form area. For example, at a given Mach number the ogives and 1/2-power bodies which have very nearly the same plan-form area have approximately the same lift throughout the angle-of-attack range, while the 3/4-power bodies and cones have lower lift by

Center-of-pressure data at low values of lift coefficient and at M = 5.00 are subject to considerable error due to uncertainties in measurements of the very small lift and moment.

It should be noted that the variation with Mach number of the lift coefficient for  $\mathrm{L}/\mathrm{D}_{\mathrm{max}}$  is similar to that predicted by the inclined cone theory of Stone. The variation of lift-drag ratio with Mach number at high lift coefficients is also in agreement with that given by Stone.

approximately the same percentages that their plan-form areas differ from those of the ogives and 1/2-power bodies.

It may be seen in the polar curves that the 3/4-power bodies, due to their low drag, are the most efficient lifting bodies at low angles of attack. However, the increase in drag with a given increment of lift is greater for these bodies and for the cones than for the 1/2-power and ogive bodies of the same fineness ratio at the higher angles of attack. This is reflected in the lift-drag-ratio curves (figs. 6(b), 7(b), 8(b), and 9(b)) where it is seen that, at large values of lift coefficient, the 1/2-power and ogive shapes are more efficient lifting shapes than the 3/4-power bodies and cones. It should be noted that the relatively low values of lift-drag ratio for the fineness ratio 3 bodies at Mach number 5.00 (fig. 8(b)) are due to the low test Reynolds number and the attendant high friction drag at this Mach number.

The centers of pressure are relatively unaffected by changes of lift coefficient, at least within the range of angle of attack where slight uncertainties in lift and pitching moment did not result in large errors in center-of-pressure determinations.

In general, the results in figures 6 to 9 show that the force characteristics of the cones and the 3/4-power bodies are somewhat similar and those of the ogives and 1/2-power bodies are similar. Furthermore, the blunt-nosed shapes of these two pairs are better than the corresponding sharp-nosed shapes from the standpoint of lower drag for a given lift coefficient throughout the test angle-of-attack range. The test results also show that up to lift coefficients of approximately 0.5 the 3/4-power bodies, which for a given fineness ratio have minimum drag at zero lift (see reference 7), retain their low-drag advantage and have the highest lift-drag ratios of the bodies tested.

#### Comparisons of Theory With Experiment

Characteristics of cones. - Experimental results showing the variation of lift coefficient with angle of attack, increment of drag coefficient, and center of pressure for fineness ratios 3 and 5 cones are compared in figure 10 with Stone's second-order theory and with impact

The tabulated values of references 9, 10, and 11 were used in conjunction with equations (21) and (22) (for drag and lift-force coefficients, respectively) of reference 12. This procedure was necessary to transfer the coordinate system from wind axes used in references 10 and 11 to body axes.

theory. For these comparisons, values of increments of drag coefficient have been shown rather than total foredrag coefficients because friction drag is not taken into account by these theories. The data in figure 10 show that the inclined-cone theory of Stone predicts with good accuracy the variation of lift with angle of attack up to angles equal to about the half-cone angles (9.46° for the fineness ratio 3 cone and 5.74° for the fineness ratio 5 cone). Increments of drag due to lift are predicted by the inclined-cone theory with good accuracy up to larger angles. In fact, agreement between theoretical and experimental drag polars is good up to experimental lift coefficients corresponding to angles of attack of 15° to 20°. It should be noted, however, that the agreement of polars (particularly in the case of the fineness ratio 5 cone) is due to low theoretical predictions both of lift and of increment of drag in the high angle-of-attack range.

The impact theory generally predicts lower lift coefficients but higher increments of drag coefficient due to lift than measured experimentally. The variation of increment of drag with angle of attack, however, is relatively accurately predicted. It is not to be expected, of course, that the impact theory should apply accurately at these relatively low Mach numbers. It is interesting to note, however, that with increasing Mach number the magnitudes of the measured force coefficients approach those predicted by the impact theory. The comparisons between impact theory and experimental results at M = 6.86 presented in reference 6 indicate that this trend continues to that Mach number.

Both the cone theory and the impact theory predict the center of pressure at a point two-thirds the cone length from the apex. The experimental results show the center of pressure to be very slightly aft (less than 3 percent of body length) of the predicted location throughout the angle-of-attack range.

Characteristics of blunt-nosed and ogive bodies.- Comparisons of typical results of the impact theory and experiment for the characteristics of the 3/4-power, 1/2-power, and ogive bodies are shown in figure 11. The trend noted in the consideration of the cone results is again evident. That is, with increasing Mach number, body force characteristics approach those predicted by the impact theory. In this connection, it is observed also that the impact theory is in somewhat better

<sup>\*</sup>Equations developed by Grimminger, Williams, and Young (reference 13)
were used for all impact-theory calculations in the present paper.
Pressure coefficients on the lee or "shaded" portions of the bodies
were assumed to be zero and centrifugal-force effects were neglected.

It is tacitly assumed that the contribution of friction drag to total
drag does not vary appreciably within a moderately large angle-of-attack
range. It is also noted that comparison of drag increments eliminates
errors in the prediction of zero lift pressure drag by the impact theory
(see reference 7).

agreement with experiment at Mach number 5.00 for these bodies than for the cones. This result is most probably due to the fact that the flow in the region of the noses of these bodies, by virtue of their relative bluntness, has more nearly the characteristics of a truly hypersonic flow than in the case of the cones. Again the centers of pressure are very slightly aft of the locations predicted theoretically.

The relatively good agreement between the predictions of the impact theory and the experimental results at the higher test Mach numbers must be considered at least partly fortuitous, since these Mach numbers are considerably lower than those for which the theory would be expected to apply with reasonable accuracy. This agreement probably results primarily because the differences between the flow conditions assumed in the development of the theory and those that actually exist, in general, have compensating effects on the aerodynamic forces on bodies. For example, the pressure coefficients on the lee portions of the bodies are assumed to be zero, while under the test conditions these pressure coefficients are probably slightly negative (see, e.g., reference 4). On the other hand, the neglect, by the theory, of centrifugal relieving forces which exist on the windward sides of the bodies tends to offset this discrepancy. Similarly, the neglect of friction forces may be partly compensated for by an incomplete transformation of the normal component of momentum to pressure forces.

An additional factor having perhaps a small favorable effect on the agreement between impact theory and experiment at Mach number 5.00 is the presence of condensed air in the flow. The change in forces due to condensed air is caused by re-evaporation of the condensed phase as it passes through the bow wave, thus bringing about a small decrease in pressure on the windward sides of the models. In addition, the pressures on the lee sides may not decrease to the normal extent if recondensation takes place.

#### CONCLUSIONS

Analysis of the results of tests at Mach numbers from 2.75 to 5.00 on inclined bodies of revolution in the Ames 10- by 14-inch supersonic wind tunnel has led to the following conclusions:

- 1. Within the ranges of fineness ratio and Mach number of the tests, the lift-drag ratios of bodies of similar shape increase with increasing fineness ratio.
- 2. At high lift coefficients the lift-drag ratio of a given body decreases with increasing Mach number.



### PHOOLITI THE OTHER PROPERTY.

- 3. At high angles of inclination the lift coefficient on bodies of equal fineness ratio varies approximately as the plan-form areas of the bodies.
- 4. The blunt-nosed bodies tested are generally more efficient lifting bodies, from the standpoint of lift-drag ratio, than are the pointed-nosed cone and ogive shapes of the same fineness ratio.
- 5. The 3/4-power body which, for a given fineness ratio has minimum zero-lift drag at high supersonic speeds, has the greatest  $L/D_{\rm max}$  of the bodies tested.
- 6. The second-order inclined-cone theory of Stone adequately predicts the variations with angle of attack of lift, increment of drag, and center of pressure up to angles approximately equal to the semiapex angles of the cones.
- 7. With increasing Mach number the aerodynamic characteristics of all models approach those predicted by the impact theory. The agreement at M=5.00 between impact theory and experiment is somewhat better for the ogive and blunt-tipped shapes than for the cones.

Ames Aeronautical Laboratory
National Advisory Committee for Aeronautics
Moffett Field, Calif.

#### REFERENCES

- 1. Stone, A. H.: On Supersonic Flow Past a Slightly Yawing Cone. Jour. Math. and Phys., vol. 27, no. 1, Apr. 1948, pp. 67-81.
- 2. Ferri, Antonio: Supersonic Flow Around Circular Cones at Angles of Attack. NACA TN 2236, 1950.
- 3. Newton, Isaac: Principia Motte's Translation Revised. University of California Press, 1946, pp. 333, 657-661.
- 4. Lord, Douglas R., and Ulmann, Edward F.: Pressure Measurements on an Ogive-Cylinder Body at Mach Number 4.04. NACA RM L51120, 1952.
- 5. DeMeritte, F. J., and Darling, J. A.: Aeroballistic Investigation of Body-Alone Models at Mach Numbers 4.38 and 2.92. Naval Ordnance Laboratory, Memo. 10132, May 1950.

- 6. Cooper, Ralph D., and Robinson, Raymond A.: An Investigation of the Aerodynamic Characteristics of a Series of Cone-Cylinder Configurations at a Mach Number of 6.86. NACA RM L51J09, 1951.
- 7. Eggers, A. J., Jr., Dennis, David H., and Resnikoff, Meyer M.: Bodies of Revolution for Minimum Drag at High Supersonic Airspeeds. NACA RM A51K27, 1952.
- 8. Hansen, C. Frederick, and Nothwang, George J.: Condensation of Air in Supersonic Wind Tunnels and Its Effects on Flow About Models.

  NACA TN 2690. 1952.
- 9. Mass. Inst. Tech., Dept. Elec. Engr., Center of Analysis. Tables of Supersonic Flow Around Cones. By the staff of the Computing Section, Center of Analysis, under the direction of Zdenek Kopal. Cambridge, 1947. (Tech. Rep. No.1)
- 10. Mass. Inst. Tech., Dept. Elec. Engr., Center of Analysis. Tables of Supersonic Flow Around Yawing Cones. By the staff of the Computing Section, Center of Analysis, under the direction of Zdenek Kopal. Cambridge, 1947. (Tech. Rep. No. 3)
- 11. Mass. Inst. Tech., Dept. Elec. Engr., Center of Analysis. Tables of Supersonic Flow Around Cones of Large Yaw. By the staff of the Computing Section, Center of Analysis, under the direction of Zdeněk Kopal. Cambridge, 1949. (Tech. Rep. No. 5)
- 12. Young, G. B. W., and Siska, C. P.: Supersonic Flow Around Cones at Large Yaw. Rand Corporation P-198, Mar. 1, 1951.
- 13. Grimminger, G., Williams, E. P., and Young, G. B. W.: Lift on Inclined Bodies of Revolution in Hypersonic Flow. Jour. Aero. Sci., vol. 17, no. 11, Nov. 1950, pp. 675-690.

М	Œ	C <sub>L</sub>	СD	Cm	L/D	c.p.	М	α	C <sub>L</sub> ,	СD	Cm	L/D	c.p.
2.75	-1.0	-0.028	0.093		-0.030		4.01	12.3	0.392	0.185	-0.292	2.12	69.2
	0	002	-092		016		1	14.1	450	.221	338	2.04	69.0
	1.0	.028	.093	-0.020	-300	67.6		15.4	-503	258	382	1.94	68.9
ļ	3.0	•086	.102	062	.845	67.8		16.2	520	.277	391	1.88	67.8
ĺ	5.0	•140	.111	~.099	1.26	66.7		20.1	.644	•395	~.501	1.63	67.6
Ι.	5.3	.156	.111	114	1.40	68.5		23.2	.723	483	589	1.50	68.9
Î	7.8	.232	.130	169	1.79	68.2		•	' -	-			
	10.3	.318	.157	23 <sup>1</sup> 4	2.02	68.7	4.48	-1.0	027	.088		306	
ĺ .	12.9	.413	.196	307	2.10	68.8	·	0	002	.088		019	
	15.1	.513	•239	388	2.15	69.5		1.0	.026	-087		298	
	15.4	.518	.243	397	2.13	70.4		2.2	.038	.096	028	•394	67.0
	15.4	506	.245	382	2.07	69.1		2.8	.075	•096	060	.786	75.1
	20.2	•714	382	558	1.87	69.6		5.0	.134	109	094	1.22	65.8
	25.3	.877	-564	718	1.56	69.7		7.8	.228	.136	165	1.68	67.7
_ , _								8.3	257	.134	193	1.91	70.4
3.49	~1.0	027	.084		325		i i	10.3	.326	.162	247	2.01	70.5
	0	.002	.084		.021			11.8	.376	.185	288	2.03	71.0
	1.0	.028	.084	020	.336	68.2		13.2	423	.210	~.329	2.01	71.6
	3.0	.086	-093	- 062	.927	68.0		15.3	.487	.260	379	1.88	70.4
	5.0	-145	.104	104	1.40	68.2		17.1	.550	.312	433	1.76	70.1
ĺ	5-3	•151	.101	107	1.50	67.0		18.1	.582	.336	443	1.73	67.3
	7.8	-232	-123	166	1.89	67.3		20.1	.643	. 394	~.490	1.63	66.3
-	10.3	•315	.152	229	2.06	68.0	[	22.1	.697	.462	539	1.51	65.7
i	15.4	.496 .493	.194 .246	296	2.08	68.0		0-					
	19.4	•490	.240	373	2.02	68.6	5.00	85	007	.109		061	
4.01	-1.0	023	.089		261			.13	.005	.099		-050	-0 -
7.01	0	.006	.088		.065		i	1.1	.046	.100	028	-457	58.3
ì	1.0	.028	.088		.320	1 1	]	1.9	-068	-111	049	.618	67.8
	3.0	.090	.088	057	1.02	60.7		2.5	.104	090	145	1.15	82.0
	3.0	.089	.096	065	927	69.0	1	4.9 6.8	.169 .221	.106 .114		1.59	74.3
	4.0	.118	.098	087	1.20	69.2		9.7			173 209	1.94 1.90	64.8
	5.0	.151	.099	101	1.52	63.3	}	13.3	.301 .417	.159 .223	365	1.87	
	6.5	.205	.110	147	1.86	68.0	1	15.3	•417 •470	.266	387	1.77	79.9
ļ	7.0	.214	.116	147	1.84	64.8	1	17.3	.4(U	225	457	1 50	73.9
	8.3	.262	.127	189	2.07	68.0		17.5	•533 483	•335 •314	382	1.59 1.54	75:1 68:8
	10.3	.328	.152	237	2.15	67.8		20.0	547	401	JUZ	1.36	68.2
	10.4	•337	.163	- 249		69.0		22.0	599	472	502	1.27	68.6
					~-,~	-,.0	<u> </u>	~	- ///	- /	,702	,	

TABLE II.- EXPERIMENTAL RESULTS, CONE, FINENESS RATIO 4

M	æ	$c_{ m L}$	$c_{\mathrm{D}}$	C <sub>m</sub>	L/D	c.p.	M	Œ.	$c_{\mathbf{L}}$	$c_{\mathrm{D}}$	C <sub>m</sub>	L/D	c.p.
2.75	-1.0	-0.028	0.064		-0.433		4.48	-1.0	-0.030	0.060		-0.495	
	Ιo	0	.063		0			-1.0	028	.063		وبلبا	
	1.0	.028		-0.017	.417	58.2		0	0	.059		0	
	3.0	.087	.075	058	1.16	64.2		1.0	.023	.062		•375	
	5.1	.150	.081	103	1.86	65.8		2.8	.072	.071	-0.050		66.9
	5.1	.161	.081	112	2.00	66.5		5.0	.195	.073	166		82.6
	7.6	.247	.097	173	2.55	66.9		7.8	.301	.109	245	2.76	78.3
	10.2	.349	.125	- 249	2.78	67.9		8.3	.281	.117	209	2.40	70.9
	10.4	.358	.131	259	2.73	68.9		10.3	.366	.149	269	2.46	69.4
	12.7	.458	.168	329	2.72	68.0		11.8	.384	.173	275	2.22	66.9
Į '	15.2	.596	.234	-,431	2.55	67.8		13.2	.460	.196	336	2.35	68.2
ĺ	15.3	.585	.230	426	2.55	68.1	i	15.3	.544	.254	404	2.14	68.3
	20.2	.848	.405	- 638	2.10	68.2		17.1	.619	<b>.</b> 306	460	2,02	67.4
}	25.3	1.067	.623	840	1.71	68.3		18.1	.668	.342	501	1.95	67.6
}	-		ļ					20.1	•751	.432	572	1.82	67.5
4.01	-1.0	025	-054		460		ł	22.1	.822	<b>.</b> 488	641	1.68	67.8
	0	.015	.051		.290							i	
	1.0	.040		033	<b>.7</b> 30	79.6	5.00	85	018	•064		285	
ļ	3.0	•100	.065	102	1.54	76.3	1	.13	.010	.065	-	.149	
ļ	3.0	•099	.063	072	1.57	70.4	1	1.1	.037	.062	- 028	-588	74.3
	4.0	.128	.067	092	1.91	69.4	11.5	1.9	.057	.067	047	845	79.2
ļ	5.0	.168	-074	122	2.26	70.4	1	2.4	.123	059	100	2.08	79.9
	6.3	.219	•083	151	2.62	66.7		4.9	.208	.081	168	2.56	78.5
	7.0	•239	•090	170	2.65	68.7	i	6.8	.268	.104	205	2.57	73.7
	8.1	•277	.101	193	2.74	66.9		7.1	.221	•099	152	2.23	65.7
ł	10.1	.360	.124	255	2.90	67.7		9.4	.298	.127	197	2.35	62.6
1	10.4	•380	.144	277	2.64	69.2		9.4	.298	-114	198	2.62	63.3
	11.4	•394	.150	276	2.62	66.4	1	10.9	.349	.168	250	2.08	66.8
1	12.2	.445	.166	320	2.68	68.0		13.3	473	.228	379	2.08	73.8
1	13-9	.518	.208	379	2.49	68.5		15.3	.548	.292	438	1.88	72.3
	15.4	.560	.239	400	2.34	66.4		17.1	.613	-343	495	1.79	72.0
1	16.1	.638	.292	471	2.18	67.9		17.9	.596	•353	422	1,69	62.4
	19.4	.721	•361	533	2.00	66.6		19.9	.677	418	478	1.62	61.4
	20.2	.787	.424	-,598	1.86	67.6		21.8	.738	•496	546	1.49	62.8
	24.2	•939	•597	755	1.57	68.6							

TABLE III.- EXPERIMENTAL RESULTS, COME, FINENESS RATIO 5

М	Œ,	$\mathbf{c}_{\mathrm{L}}$	c <sup>D</sup>	C <sub>TO</sub>	r/d	c.p.	М	α	$c_{ m L}$	C <sub>D</sub>	Cm	ľ/p	c.p.
2.75	-1.0		0.058		-0.548		4.01	12.1		0.155	-0.346		68.6
1	0	002	.057		035			13.9	.561	.215	-410	2.61	68.8
	1.0	.025	.057		442			15.6	.676	.279	513	2.42	70.8
	3.0	-092	.060		1.54			16.0	.680	.268	-494	2.54	67.9
	5.0	.161	.067		2.40			20.0	.858	.416	<b>-639</b>	2.06	67.3
1	5.0	.163	.064	-0.112	2.53	66.5	1	23.6	1.022	•579	~790	1.76	67.5
	7.6	.249	.082	172	3.02	66.7		l					
.	10.1	-371	•113	260	3.27	67.5	4.48	-1.0	034	•0/1/1		757	
	12.6	-499	.156	352	3.20	67.6		0	008	-042		183	
	15.0	.651	.221	- 462	2.95	67.4		1.0	.022	045		•488	
1	15.2	.670	.231 .245	488	2.91	69.0		2.3	.056	049		1.14	70.0
	15.7 20.1	.677 .941	.413	494	2.76	66.7	<b>S</b>	2.8	-079	.052 .062	065 118	17.52	79.9
	23.2	1.123	.565	- 687	2.28 1.99	67.3		5.1	.155	.080	~•TTO	2.49	73.9
1	23+2	رعدبد	رمر.	841	7.77	01.0		7•5 7•9	.267	.088	175 198	2.10	67.4 71.3
3.49	-1.0	030	.053		558			10.0	.361	.117	251	3.03	66.7
5,45	ō	•001	.051		015			12.6	486	.172	342	9.89	66.8
	1.0	.027	.052	018	529	63.6		13.1	.540	236	391	2.20	67.4
ļ ļ	3.0	.094	.055	067	1.71	69.4	ļ	15.2	.636	.250	490	2.55	72.1
	5.0	.160	062	109	2.59	66.6		17.2	.732	324	564		71.0
	5.0	.1.60	.061	109	2.63	66.6		17.4	734	.321	542		68.1
	7.6	-257	.080	179	3.22	67.7		,	-   0	.5	, ,,,,		
•	10.1	-372	.113	266	3.28	68.8	5.00	85	026	.050	₩ ₽	518	
}	12.6	504	.167	~.361	3.02	68.3	ľ	.13	.003	.048		.069	
	15.0	.628	.290	460	2.16	67.4		1.1	.029	.054		•53 <sup>[</sup> 4]	
	15.2	<b>.</b> 643	.236	468	2-72	68.6		1.9	.052	.049		1.05	1
	20.1	.874	.478	658	1.83	<b>66.</b> 8		3.2	.093	.054	068	1.73	71.1
	22.6	1.037	•553	- 810	1.88	69.2	ł	5.0	.155	.069	119	2.24	74.4
١. ا			l .					6.7	.218	.084	171	2.61	75.8
4.01	-1.0	027	•050		538		f .	7.5	.233	.095	137		56.5
	0	.002	.043		•039			9.4	.307	.124	190	2.47	58.7
] ]	1.0	.025	•050		-505			11.0	-380	.128	231	2.96	58.0
	2.5	074	.055	059	1.34	76.9	ł	13.3	-530	•190	419	2.79	75.0
	3.1	.107	.052	078	2.06	71.2		15.2	.608	.250	491	2.43	75•3
1	4.0	.126	.059	093	2.14	71.7		17.2	.722	.329	582	2.20	73.9
1	5.1	.179	.062	130	2.89	70.5		17.2	-727	-339	528	2.14	66.4
	6.3	.219	.065	153	3.36	68.0		19.7	.832	.434	636	1.92	68.4
) i	7.1	.256	.075	182	3.41	69.2		21.6	.899	-516	⊶.683	J.•74	66.3
	8.1	.290	.084	203	3.46	67.8		l					
	10.1	-375	ىند.	267	3.37	68.6						 	

М	ರ	$\mathtt{c}_{\mathtt{L}}$	$c_{ m D}$	Cpa	r/d	c.p.	М	B	$c_{ m L}$	<sub>G</sub>	C <sub>rat.</sub>	L/D	c.p.
2.75	-1.0	-0.035	0.049		-0.713	1	4.01	5.1	0.177	0.052	<b>-0.1</b> 24	3.40	68.6
	0	0	•046		_			7.1	.260		181		68.0
	1.0	•030	.049	-0,017	.619	56.8		10.4	.462		328		69.0
	3.0	.096	-047	061	2.03	62.3		13.4	.654	-184	465	3.55	68.5
	5.1	.162	•050	104		62.6							ł
	5.3	.180	.062	134	2.88	72.2	5.00	85	003	•039		066	
	10.3	.434		301	3.83	67.4	Ī	.13	.023	-037		.620	
	15.5	.811	.248	-•568	3.27	67.0		1.1	.052	.046	042		78.8
1.								2.4	•093	.049	084		88.0
4.01	-1.0	- 030	-045		664			4.9	.174	.062	132		73.5
	0	.004			•095		1	6.8	.244	.074	180		71.9
i :	1.0	.035		- 023	.803	63.0		8.0	.267	.106	160		57.5
	3.0	.101	-042	067	2.40	64.9		9.9	.376	.122	233	3.10	59.5
	4.0	•136	-047	-•090	12.88	64.4							



Y INFORMAT

TABLE V.- EXPERIMENTAL RESULTS, 3/4-POWER BODY, FINENESS RATTO 3

M	α	$^{ m C}_{ m L}$	c <sub>D</sub>	c <sub>m</sub>	r/p	c.p.	М	Œ.	$c_{ m L}$	$\mathbf{c}_{\mathrm{D}}$	C <sup>m</sup>	r\p	c.p.
2.75	-1.0		0.080		V-331		4.01	7.0	0.228	0.102	<b>-</b> 0.147	2.23	61.7
ì	0	•002	.081				1	8.3	.270	•110		2.45	61.7
	1.0		.081	-0.021		66.8	1	10.3	• 31/4	-141			62.0
ĺ	3.0		.089		1.02	59.6	1	12.4	•411	.173	278		63.3
	5.1	•154	•096	098		60.4		14.1	•474	.206	324	2.30	63.5
}	5.3	.166		108		62.0		15.4	-536	-251			62.7
	7.8		•113	162		62.2	Ľ	16.1	•562	•270	400		65.0
	10.4	•343	.143	229		63.0	Ī	20.2	•706		502		62.8
	10.4	•354	.144	234		62.6	ļ	24.2	.823	<b>-</b> 536	623	1.54	64.2
	12.9		.180	299		63.0				-0-			
	15.2 15.4	•551 560	•237 •242	369		62.1	5.00	85		.082		064	
	15.5	•562 •549	.244	386		63.7		•13		.080		-394	
	20.2	•772	•2 <del>44</del>	380 542		64.0	1	1.1	•046	.071		•651	
1	25.3	948	•588	703	1.96 1.61	63.0 63.3	!	1.9	•064 •061	•075		•855	
1	[-7.3	• 240	المار •	-• (05)	TOOT	03.3	į	2.5	.146	.084	<b></b> 033	•724	
4.01	-1.0	023	.071		327		<u> </u>	4.9 6.6	•146 •208	•093 •105	095 138		62.1 63.2
	0	006	.072	<b>.</b>	084			7.4	.232	.123	151	1.88	61.2
[	1.0	.031	.072	025		76.5		9.7	•297	.148	192	2.00	60.5
ŀ	3.0	•091	.078	061		64.7		11.2	.334	.179	196	1.87	54.1
ŀ	3.0	•092	•074	059	1.24	61.8		17.5	•529	.315	322	1.68	53.7
· .	4.0	.121	082	082		64.8		20.0	.623	.396	413		57.3
	5.0	.158	.072	100		60.9		22.0	.688	472	473		58.0
	6.5	-213	•092	134		60.3				- · · ·	- ,, 5		

TABLE VI.- EXPERIMENTAL RESULTS, 3/4-POWER BODY, FINENESS RATTO 5

М	α	$\mathrm{c}_{\mathbf{L}}$	$c_D$	Cm	L/D	c.p.	М	a	$c_{\mathbf{L}}$	$c_{\mathrm{D}}$	C <sub>m</sub>	L/D	c.p.
2.73	-1.0 0	-0.035 002	0.043 .034	1 1	-0.817 059	1 1	4.01	8.1 10.1	0.313 .415	0.083 .118	278	3.52	63.7 64.7
:	1.0 3.0	.028 .097	.044 .053	<b>-0.</b> 055	.635 1.82	 55.2		12.1 13.9	.523 .611	.157 .202	353 413	3.02	64.8 64.3
	5.0 5.1	.170	.061	110 098 167		63.1 56.7		16.0 20.0	.726	.429	-•495 -•638 -•775	2.15	64.0 63.2
	7.6 10.1 12.7	.262 .390 .541	.079 .112 .162	253 356	3.48 3.48 3.33	61.9 62.6 63.1	5.00	23.1 85	1.083 006	•578 •041		1.38	63.5
	15.0 15.2	•714 •718	.234	-•468 -•484	3.04 2.96	62.4	J.00	.13 1.1		.036		.737 1.09	<b>-</b> -
	20.1	1.064	.448	730	2.38	63.5		1.9 2.5	.076 .090	.039 .046		1.96 1.95	
4.01	-1.0 0	030 002	•039 •037		776 046			5.0 6.7	.185 .243	.058		3.19	
	0 1.0 3.0	.002 .028 .097	.034 .040 .046	019	.051 .712 2.11	65.3 60.6	'	7.0 9.4 10.7	.267 .360 .431	.083 .131 .162	171 247	3.22 2.74 2.66	62.2 65.5 65.6
	3.1 4.0	.105 .134	.046	068 080	2.30	63.4		15.2 17.2	.681 .727	.311 .357	298 497 502	2.19	67.3 62.7
	5.1 6.3	.180 .240	.056	118 156	3.21 3.63	64.2 63.4		17.2 19.6	.769 .845	•375 •453	563 614	2.05 1.87	66.6 64.8
<u></u>	7.1	•259	.072	167	3.61	62.7		21.6	•959	•548	688		63.1

TABLE VII.- EXPERIMENTAL RESULTS, 1/2-POWER BODY, FINENESS RATIO 3

М	a	$c_{\mathbf{L}}$	$c_{ m D}$	C <sup>zu</sup>	L/D	c.p.	М	α	$c_{ m L}$	$c_{\mathrm{D}}$	C <sub>m</sub>	L/D	с.р.
2.75	-1.0	-0.32	0.092	1	-0.344		4.01	14.1	0.491	0.229	<b>-0</b> -308	2.14	57.9
	0	0	.094		0			15.4	•575	.279	-364	2.06	57.8
	1.0	.031	•094	0.022	•333	68.3		16.1	.586	-291		2.01	57-3
	3.0	.100		064	•999	60.6	1	20.2	749	.423	~•490		57.7
	5.1	.168	.109	101	1.54	57.0		20.2	.760	.432	<b></b> 489	1.76	56.7
1 .	5.3	.177	.107	103	1.66	55.2		24.2	.882	-577	<b>~</b> 614	1.53	59.0
	7.8	.272		160		55.7							
	10.4	-392		241	2.30	57.7	5.00	85	008	-099		080	
	15.2	•599		<b>-</b> •355	2.29	54.9		-13	.010	.096		.100	
	15.5	.620		392	2.24	58.4	1	1.1	•037	.098		.380	
	20.2	.839		545	1.95	58.2		1.9	.055	.096		-579	<u>-</u> -
	25.3	1.031	.629	- 697	1.64	58.1		2.5	.064	•098	048.	.654	
1,			-04				·	4.9	.148	.117	095	1.26	60.6
4.01	-1.0	023						6.6	•193	-119	119	1.62	57.9
	0	•005			.062		:	7.8	.231	-142	125	1.62	50.3
1	1.0	•033			-372		ļ	9.7	-295	•169	165	ししょくり	51.7
	3.0	•094			1.04	54.0		11.2	349	•192	205	]1.82	53.9
	3.0	•095		056		56.1		13.3	.421	.227	-	[1.85	
	4.0	-126		074	1.29	55.8		15.3	-515	.289		1.78	
	5.0	.135		058		40.4	į	17.3	.603	•354		1.70	, <del>-</del> -
1	6.5	.220		129		55-9		17.5	•536	• 342	299	1.57	48.7
1	7.0	.233		137		55.6		20.0	.653	431	393	11.57	51.6
	8.3	-280		166		56.1		22.0	•737	•506	463	1.46	53.0
	10.3	•351	150	212		56.8	<b>i</b> .						ĺ
	12:4	.425	-195	263	5.10	57.6							]

TABLE VIII.- EXPERIMENTAL RESULTS, 1/2-POWER BODY, FINENESS RATIO 5

M	æ	$\mathrm{c_{L}}$	$c_{\mathrm{D}}$	c <sub>m</sub>	r/p	c.p.	М	œ	$\mathtt{c}_{\mathtt{L}}$	$\mathtt{c}_{\mathrm{D}}$	Cm	L/D	с.р.
2.75	-1.0	-0.038	0.051		-0.748		4.01	13.9		0.225	-0.406		58.7
	0	002	.051		046			16.0	.805	•309	496		57.7
} }	1.0	•034	.052	-0.017	-655	48.2	]]	20.1	1.038	.488	- 660		57-9
1	3.0	.109	.054	052	2.02	46.0		23.1	1.213	.643	801	1.89	58.5
1 i	5.1	.185	.066	091		47.7	1		}	l .			
	5.1	.193	.069	101		-	5.00	<b></b> 85		.060	ļ	258	
1	7.6	.298	.089	160		52.0	[	.13		.056		·	
j	10.1	448	.130	254		54.7		1.1	.028	.058		.490	
	12.4	.610	.188	-•355	3.25	55.8	{{	1.9	-047	.062		.758	
	15.0	.815	.279	479	2,92	55-7	1	2.4	-064	.052		1.24	
1.	20.2	1.255	•514	811	2.44	59.6	Į .	5.0	.156	.069	- <b>-</b>	2.25	
1. 1							ii i	6.9	.241	.090		2.69	
4.01	-1.0	<b>~.</b> 030	-045		669			7.7	.300	1111	140		44.8
	0	.006	.046		.132		<b>}</b> }	9.4	.365	.145	183		47.7
	1.0	.039	•046	023		-	<b>i</b> l .	11.0	.459	.203	269	2.26	54.9
	3.0	.116	.052	061		51.6		13.3	-558	.245	361	2.28	60.3
	4.0	.143	.057	068		46.2	<u>f</u> f	15.2	.681	.308	443		60.0
	7.1	.284	.076	169		58.1		15.2	-774	.302	-•547	2.56	66.2
	8.1	•339	.077	~.195		56.4	<b>]</b> ]	17.1	-854	-370	584	2.31	63.1
	10.1	- իրիի	.131	264		57.4	ll l	17.2	-849	.373	- 584	2.28	63.4
	10.4	•451	.135	271	3-33	58.0		19.7	-967	<b>.</b> 480	643		60.1
1 1	12.1	•555	-175	338	3-17	58.2		21.6	1.079	•599	731	1.80	59-9



TABLE IX.- EXPERIMENTAL RESULTS, TANGENT OGIVE, FINENESS RATIO 3

M	α	СĽ	$c_{\mathrm{D}}$	C <sub>m</sub>	r/d	c.p.	M	α.	$c_{ m L}$	$c_D$	C <sup>IUI</sup>	L/D	c.p.
2.75	-1.0	-0.028	0.113		-0.252		4.01	10.3	0.373	0.175	0.218	2.13	54.7
"	0	•004	.108		•032			12.4	•450	<b>.</b> 209	274	2.16	56.5
	1.0	• 0,11	.113		•392			14.1	•517	.246	<b>~•</b> 323		57-5
	3.0	•114	.117	-0.066	•971	54.8		15.4	-578	.294	351	1.97	55.2
	5.0	.188	•131	108	1.43	54.3		16.1	.601	.311	368		55.4
1	5.3	•196	.124	112	1.59	54.0		19.5	•735	.418	470		56.4
1	7.8	•293	-153	175	1.91	56.3		20.2	•755	•443	485		56.3
]	10.4	•396	•190	239	2.09	56.4		24.2	.884	-592	605	1.49	57.6
	10.4	.410	•198	239	2.07	54.4			١,	,	}		
	13.0	•502	•233	- 307	2.16	56.8	5.00		004	.11.4		038	
	15.2	.618	•293	384	2.11	57.1		.13	016	-110		148	
1	15.5	.615		384	2.10	57.2	1	1.1	•003	•113		•030	
	15.5	•634	•299	388	2.12	56.2	l	1.9	•058	-117	•032		51.5
	20.2	.848	.460	554		58.0		2.5	.045	.106		.423	
	25.3	1.040	•668	713	1.56	58.0		4.9	.123	.122	053	1.01	39.6
<b>].</b>			l	İ				6.6	•183	.136	096		48.8
4.01	-1.0	027	104		261			7.9	.289	•149	189		61.6
	0	.007	•103		•064			9.7	•328 •385	-205	189		52.8
	1.0	•031	•104		•299			11.2		.225	232	1 70 1 70	55.0
	3.0	-104		059	.936		ŀ	13.3	.432	.243	306	17 CO	64.2
	3.0	.116	.103	079	1.13	65.1		15-3	•503 508	•301 •38	~•355	1.60	62.9
	4.0	•139	•115	076	1.20	52.0		17.3	•598	368	422		62.0 42.1
1	5.0	.217	•114	152	1.89	67.4		17.5 20.0	•503 •609	-358   •444	248		46.7
	6.5	.241	.123	136	1.96	53.6		22.0	.688	•513	400		48.2
1	7.0	.289	.134	200	2.16	66.0		احد،	••••	• 🚉	-•400	1.07	70.2
	8.3	•297	•145	170	2.05	53•9	Ļ	<u> </u>		<u> </u>	<u> </u>		

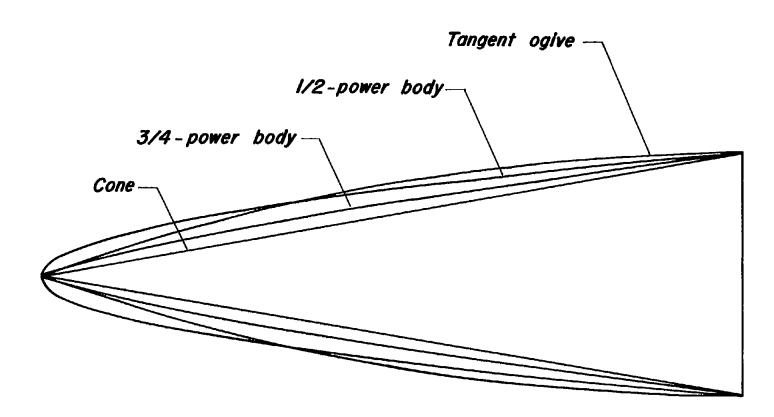


TABLE X.- EXPERIMENTAL RESULTS, TANGENT OGIVE, FINENESS RATIO 5

М	α	$\mathtt{c}_\mathtt{L}$	$c_{\mathbf{D}}$	Cm	r/D	c.p.	М	a	СĽ	$c_{\mathrm{D}}$	$c_{m}$	r/p	c.p.
2.75	-1.0	-0.045			-0.806		4.01	8.1		0.103	0.190	3.45	51.8
	0	001	•053		023			10.1	.466	.141	266	3.30	55.0
	1.0	•039	•054		.726		Ì	12.1	•578	.182	-•335		55.5
	3.0	.121	.066		1.84			13.9	•684	-230	408	2.97	56.8
	5.1	.213	•077	-0.123	•	56.0		16.0	.822	.322	508	2.55	57.8
l	7.6	.342	.102	202		57.4		20.1	1.034	•495	657		57.6
	10.2	•479	.146	286		57.6	1	24.6	1.250	•725	838	1.72	58.2
	10.5	•510	.158	307		58.0	l						
	12.7	.648	.208	397	3.11	58.5	5.00	85		-053		663	
	15.1	.826	294		2.81			•13	006	.052		126	
]	15.3	-839	•294	523	2.85	59.1		1.1	•006	•053			
	20.2	1.303	-532	861		61.5	li .	1.9	•034	-057		.601	
	23.6	1.539	<b>.</b> 699	-1.030	2.20	61.0		3.0	•103	.062		1.67	
								4.9	•181	.082		2.20	1
4.01	-1.0	040	.047	~ <b>-</b> '	839			6.6	<b>.</b> 255	1116		2.20	
	0	0	•048		0			6.9	.252	.117	-, 114	2.15	43-2
١. ا	1.0	.036	•051	022		58.7		7.2	.258	.118	118	2.18	43.6
	1.0	•037	.048	019		50.7	ļ	9.4	•351	-147	182	2.39	49.1
	2.5	.096	.058	<b> 048</b>	1.66	48.4	li	10.7	•417	180	216	2.32	48.8
	3.1	.131	•060	076	2.16	56.5		13.3	•597	•269	363	2.22	56.5
	4.0	.159	.067	082	2.39	50.1		15.3	.712	•329	432	2.16	55.8
	5.1	.219	.074	125	2.96	55.6		17.2	.778	369	515	2.10	60.5
	6.3	.277	.083	144	3.34	50.6		19.7	918	485	623	1.89	60.5
	7.1	-310	.092	181	3•39	56.6		21.6	1.047	•595	727	1.76	60.6

TABLE XI.- EXPERIMENTAL RESULTS, TANGENT OGIVE, FINENESS RATIO 7

М	α	$c_{ m L}$	$c_{\mathrm{D}}$	C <sup>tu</sup>	L/D	c.p.	М	α	$c_{ m L}$	$c^{\mathrm{D}}$	Сm	r\p	c.p.
2.75		-0.039			-0.880		4.Ol	5.1		0.063	-0.130 183		56.0 58.6
	0 1.0	005 -036		-0.015		41.6		6.3 7.2	•305 •341	.081	173	4.21	49.6
	3.0 5.1	.124 .214	.052 .062	062 110	_	49.1 50.2		10.4 13.5	•574 •808	.152 .243	349 499	3-32	59•0 59•3
	5.3 10.5	•233 •563	.071 .147	130 331	3.26 3.84	54.3 57.0	5.00	85 .13	019 .016	.041 .040	1 1	463 -410	
	13.0	.786	.220	469		57-5		1.1 1.9	.042 .074	.041	021 033	1.04	50.3 43.4
4.01	-1.0	040	.046		868			2.4	•082	•0 <del>1</del> 1	044 125	1.86	52.3
	0 1.0	•005 •049	.048 .047	027	•114 1•04	54.0		4.9 6.9	.206 .324	•070 •098	212	3.30	59.1 63.6
	3.0 3.1	•135 •136	.052 .051	070 077	2.59 2.68	50.4 55.3		8.5 10.3	•383 •479	.135 .178	236 276	2.84 2.69	59.1 54.8
	4.1	181	.056			51.2		<u> </u>					



(a) Profiles of fineness ratio 3 bodies.



Figure 1.- Test bodies of revolution.

Cones

3/4-power bodies

1/2-power bodies

Tangent ogives

(b) Test bodies of revolution of fineness ratios 3, 4, 5, and 7. Figure 1.- Concluded.

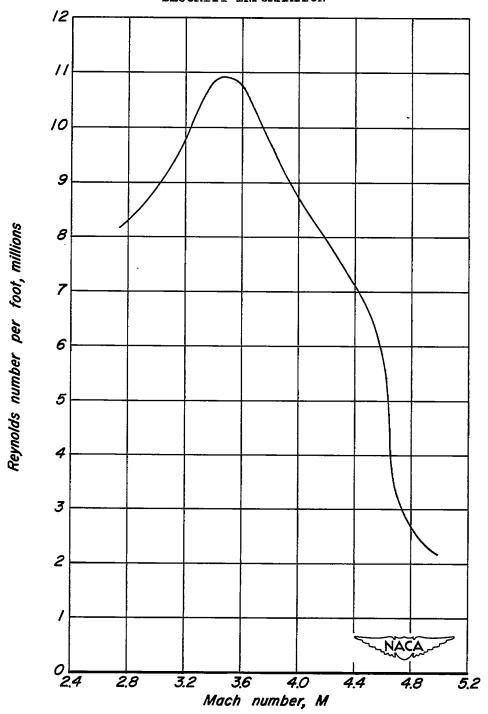


Figure 2.- Variation of Reynolds number with Mach number in the Ames 10- by 14- inch supersonic wind tunnel.



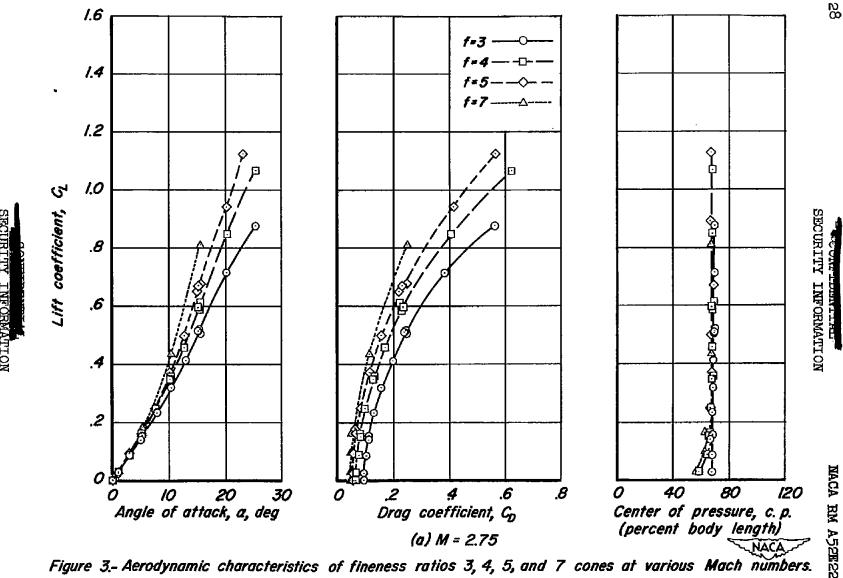


Figure 3.- Aerodynamic characteristics of fineness ratios 3, 4, 5, and 7 cones at various Mach numbers.



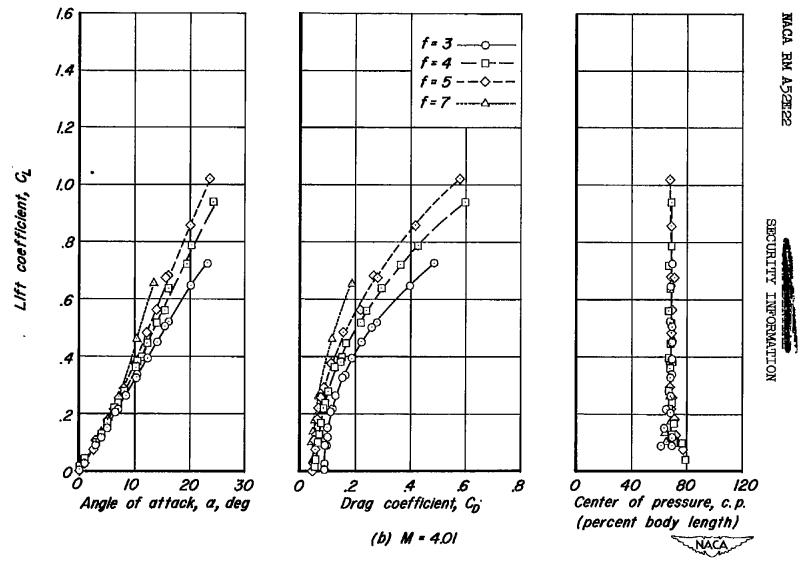


Figure 3.-Continued.

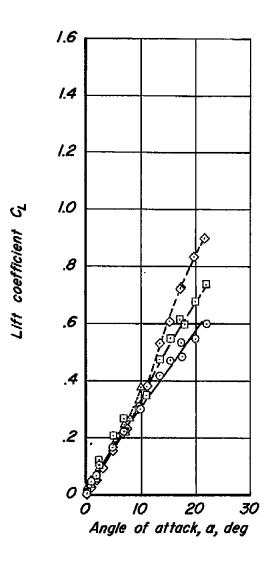

TY INFORMATION

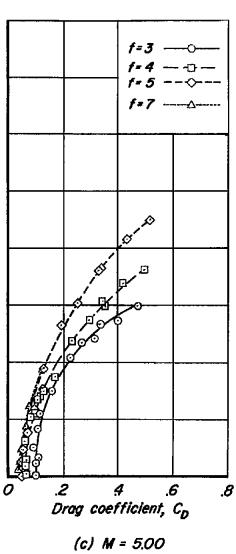

(c) M = 5.00 Figure 3.- Concluded.

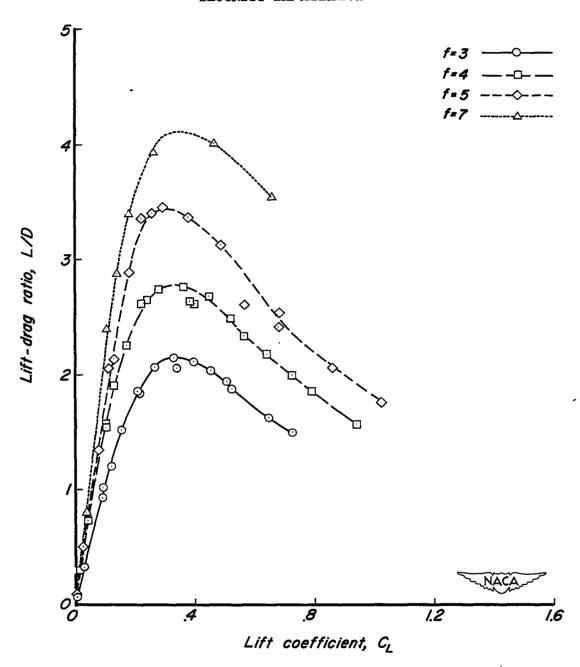


Figure 4.-Variation of lift-drag ratio with lift coefficient for fineness ratios 3, 4, 5, and 7 cones at Mach number 4.01.

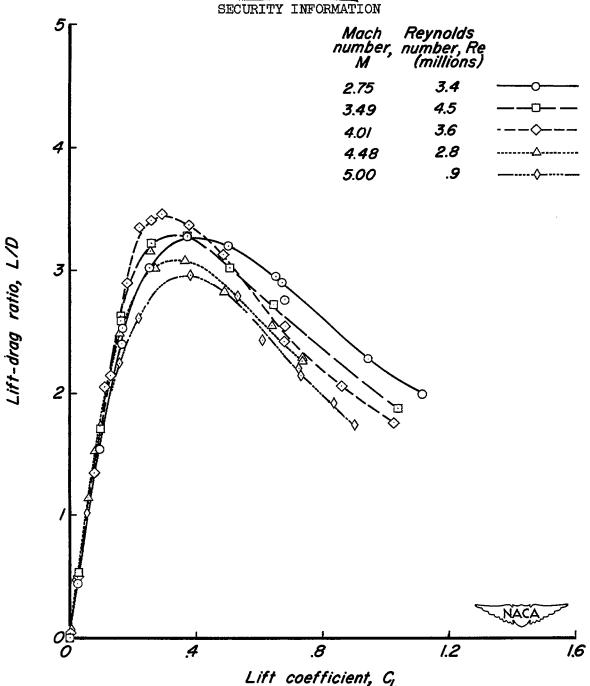


Figure 5.- Variation of lift-drag ratio with lift coefficient for the fineness ratio 5 cone at various Mach numbers.


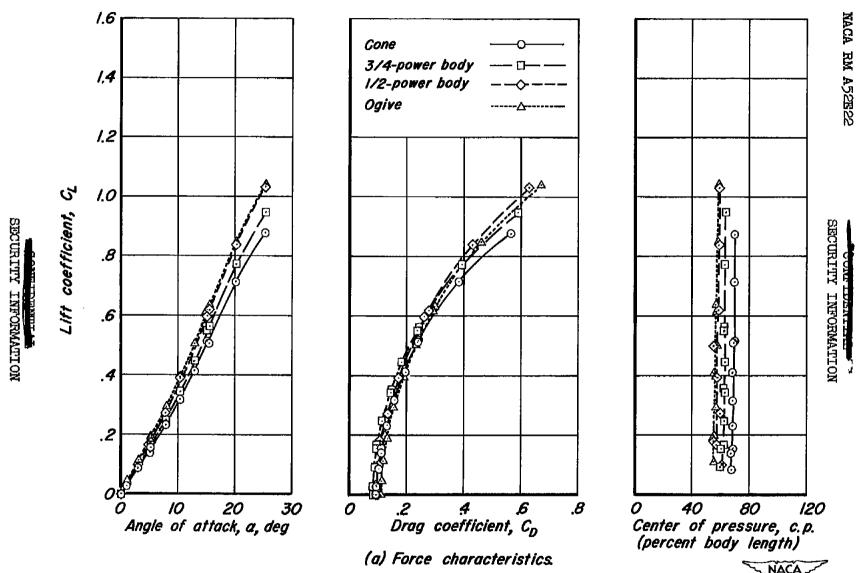


Figure 6.- Aerodynamic characteristics of fineness ratio 3 bodies at M = 2.75.

ಜ

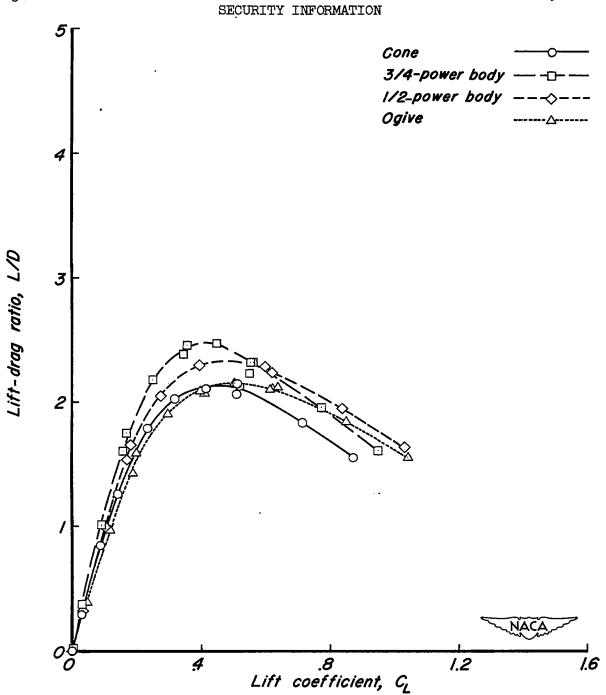

(b) Lift-drag ratios. Figure 6.- Concluded.

COMPTDEMINAL

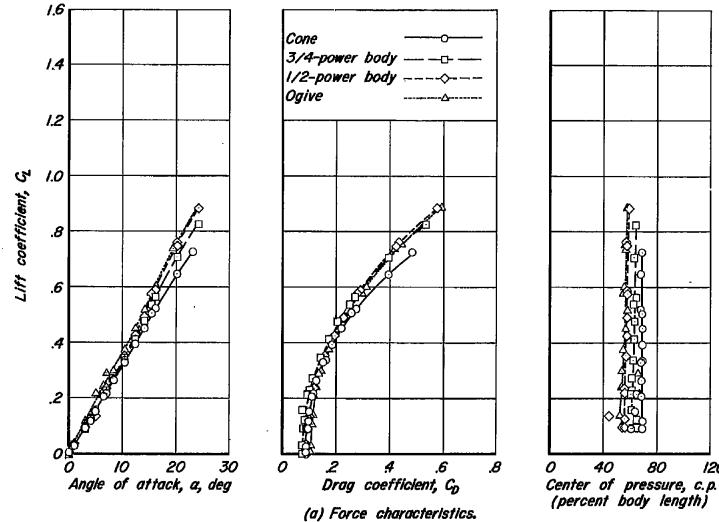



Figure 7.-Aerodynamic characteristics of fineness ratio 3 bodies at M = 4.01.

80

120



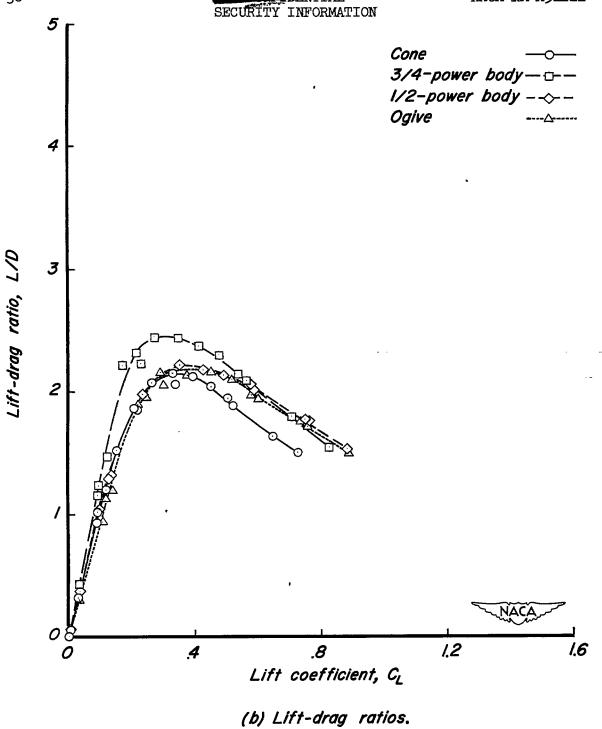


Figure 7.-Concluded.



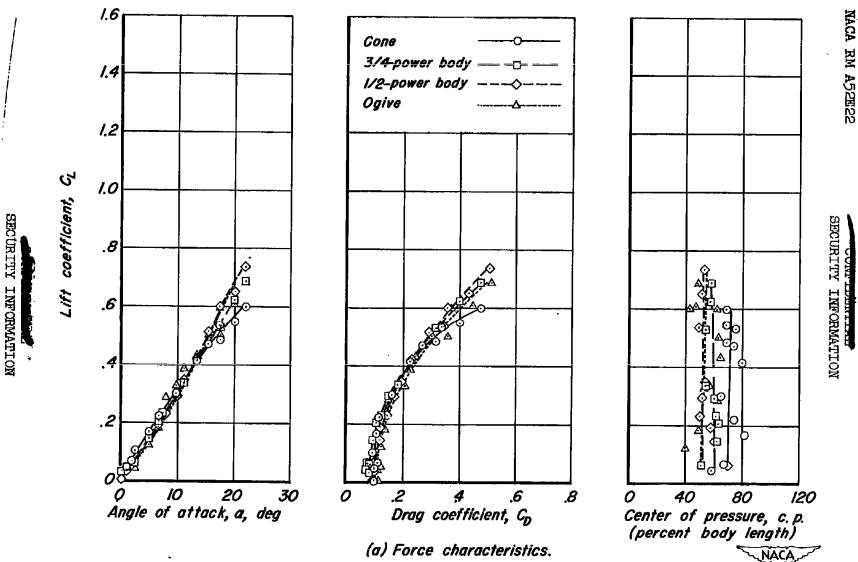



Figure 8.- Aerodynamic characteristics of fineness ratio 3 bodies at M = 5.00.

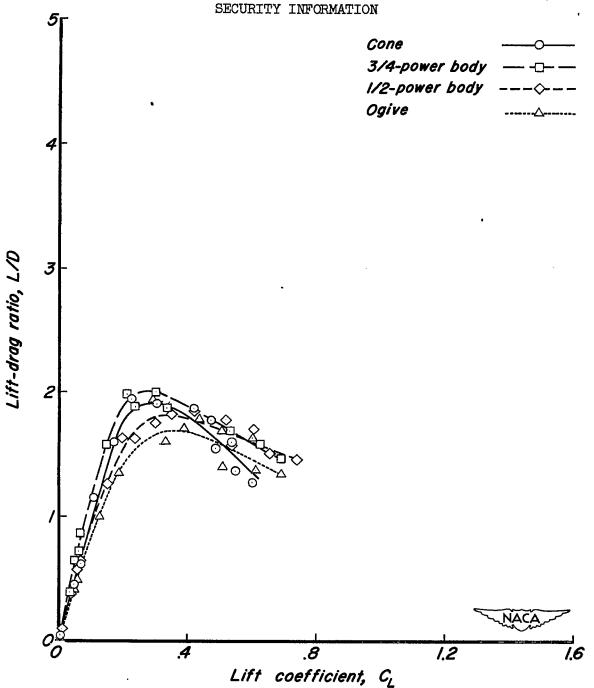

(b) Lift-drag ratios.


Figure 8.-Concluded.

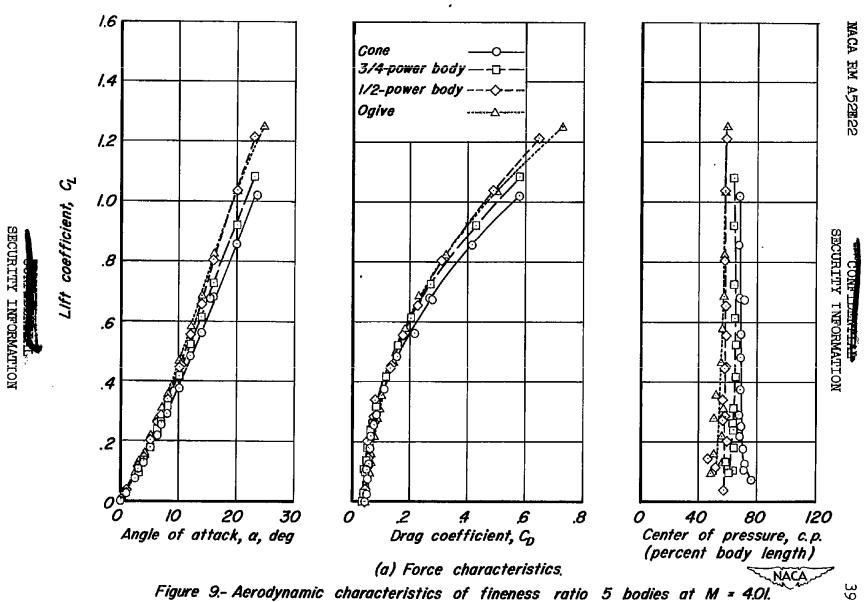

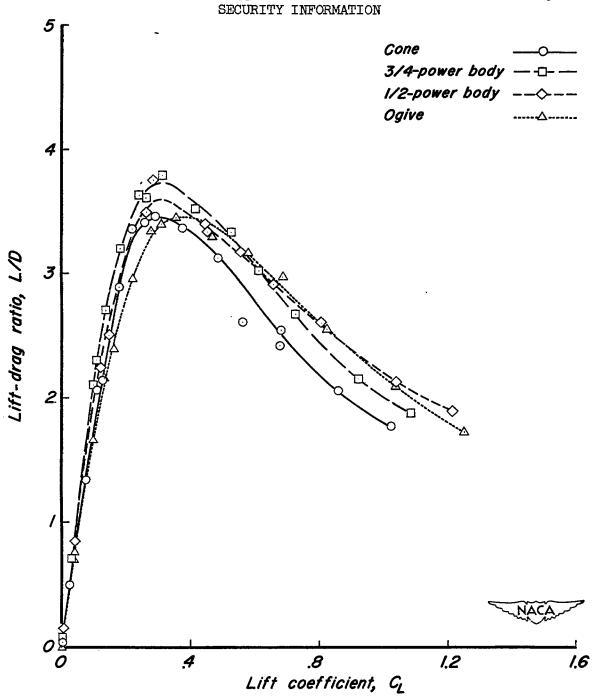

(b) Lift-drag ratios.

Figure 9.- Concluded.








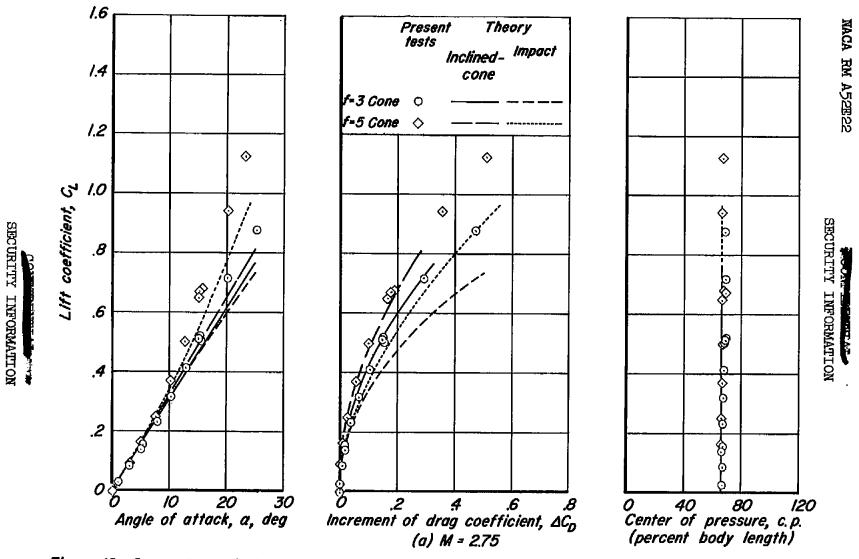


Figure 10.- Comparison of theoretical and experimental aerodynamic characteristics of fineness ratios 3 and 5 cones for various Mach numbers.

Ė

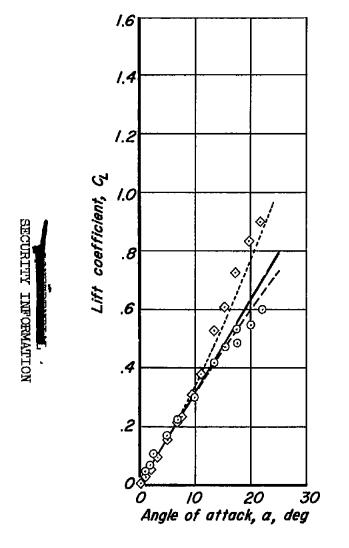

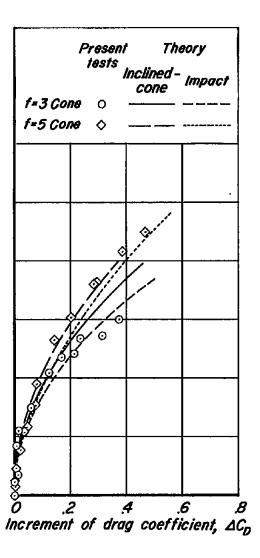

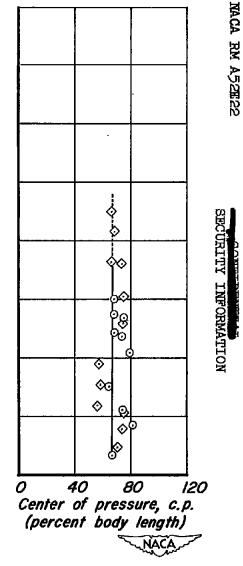

(c) M = 5.00 Figure IO.-Concluded.

₹



NACA RM A52522



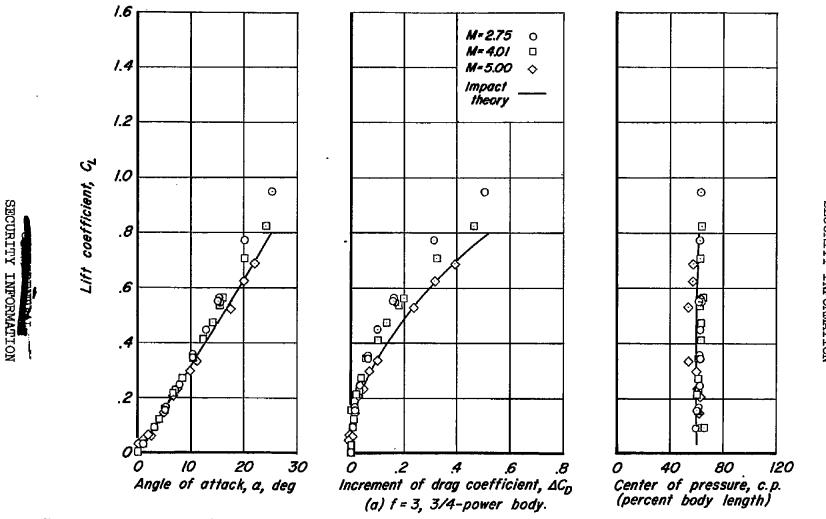



Figure II.-Comparison of typical theoretical and experimental aerodynamic characteristics of fineness ratios 3 and 5 ogives and blunt-nosed bodies at Mach numbers 2.75, 4.01, and 5.00.

1.6

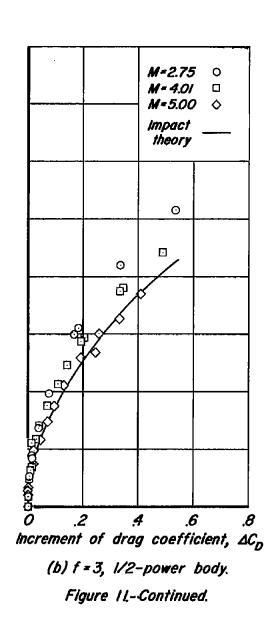

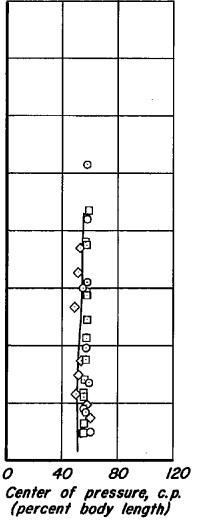

4

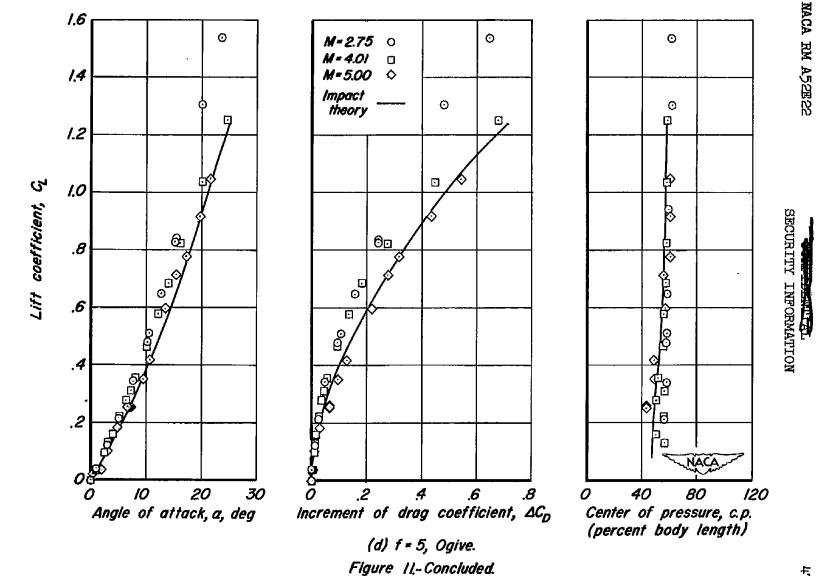

占